



FUMEVAC FV-225-3

SPECIFICATIONS

Models: 6.75HP | 240V | 21A | 50-60Hz

6.75HP | 460V | 11A | 50-60Hz 6.75HP | 600V | 8.5A | 50-60Hz

Max Flow: 400 CFM

Max Vacuum: 145" H₂0

Filtration Area: 225ft², 99.9% at 0.5μm, 80/20 media

Noise @ 5': 68 dB Weight: 500 lbs

Dimensions: 18.375" w x 43.75" h x 40" d



A PORTABLE, MULTI-FUNCTION UNIT FOR YOUR WELD FUME EXTRACTION NEEDS

FumeVac FV-225-3 offers multiple options to control pollutant emissions. Capture welding fume with vacuum assisted MIG guns or with extraction nozzles are just a couple of examples. The FV-225-3 can either be used as a mobile unit or as a vacuum source for a small network, up to two guns. Filtered air can either be recirculated back to the workspace or exhausted outside. The functional design enables each turbine to work separately at a very low noise level. FV-225-3 is unique with its source extraction performance, as well as, the quality of its engineering.




FEATURES & BENEFITS

- Filter efficiency: 225ft2, 99.9% at 0.5µm, 80/20 media
- Designed for fume and dust extraction up to 125+ CFM at gun
- Can be used as portable or central unit for a small network of up to two guns
- Filters air for recirculation, either back into the work space or outside
- Low noise level when operating 68 dB @ 5'
- Hour meter for tracking maintenance
- Remote starting weld current sensors available
- Heavy-duty casters for easy maneuvering
- Manometers
- Filter life indicator
- Remote start 0-5h delay switch
- 1-2" and 1-3" inlets, with 4" outlet

PARTS & ACCESSORIES

- 400A & 500A ErgoMax MIG guns
- ErgoMax MIG gun options for multiple wire feeder brands
 - Lincoln, Miller, Tweeco, and more
- Hose options
 - Superflex or Heavy duty
- · Replacement filters
 - Primary (80/20 media)
 - Secondary (Spunbond Poly MERV 16)
- Remote starting using weld current sensors
- Hose cover
 - Leather or Kevlar

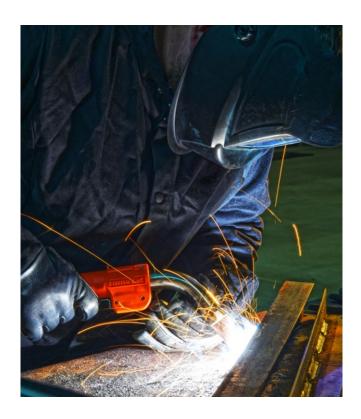

CALL YOUR REPRESENTATIVE TODAY TO FIND THE RIGHT SYSTEM FOR YOU!





3100 Maple Road SE Lindale, GA 30147 sales@sledge-tech.com | (706) 622.3039