

FUMEVAC FV-225

SPECIFICATIONS

Models:	DC-120V – Single; DC-120V – Double, 28,000 RPM turbine
Duty Cycle:	100% w/CO2 60% w/ Mixed Gas
Max Flow:	120 CFM
Max Vacuum:	90" wc
Filtration Area:	14" (110ft ²) 99.9% at 0.5µm, 80/20 26" (225ft ²) 99.9% at 0.5µm, 80/20
Noise:	78 dB
Weight:	60 – 70lbs
Dimensions:	32" – 44"



A SMALL, INTERMITTENT DUTY VACUUM FOR LIGHT APPLICATIONS

The FumeVac FV-225-2 portable fume extractor is the most efficient and versatile solution for fume and dust source capture when central systems cannot be used or are too expensive. This portable model is specifically

designed for semiautomatic MIG/FCAW welding. Powered by two 28,000 RPM turbines the FV-225-2 is capable of 90-125CFM at the torch. It is easily transportable and offers minimal cost of ownership. Perfect for a maintenance shops and light duty operations.




FEATURES & BENEFITS

- Each unit available with:
 - 14" (110 ft²) or 26" (225 ft²) high-efficiency filter
 - Panel mount breaker
 - -2 models, 1PH, 220V w/L14-20P plug
 - Manometer
 - On/Off switch
 - 2.5 inch inlet
- Filter efficiency of 99.9% at 0.5 µm
- Options available:
 - FV-HEPA-SC: HEPA filter & adapter
 - FV-ASAS-Power Signal Auto Start/Stop
- Optional remote starting weld current sensor

PARTS & ACCESSORIES

- 400A & 500A ErgoMax MIG guns
- ErgoMax MIG gun options for multiple wire feeder brands
 - Lincoln, Miller, Tweeco, and more
- Hose options
 - Superflex or Heavy duty
- Replacement filters
 - Primary (80/20 media)
 - Secondary (Spunbond Poly MERV 16)
- Remote starting using weld current sensors
- Hose cover
 - Leather or Kevlar

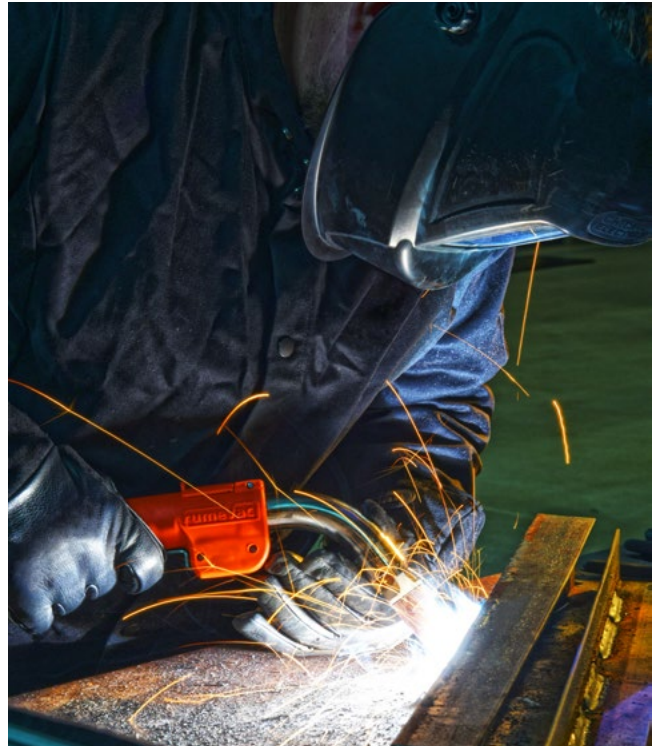

**CALL YOUR REPRESENTATIVE
TODAY TO FIND THE RIGHT
VACUUM FOR YOU!**



3100 Maple Road SE
Lindale, GA 30147
sales@sledge-tech.com | (706) 622.3039